


Better Printer , Better Service

儒彩, 只做优质打印机



GROW UP YOUR BUSINESS WITH US

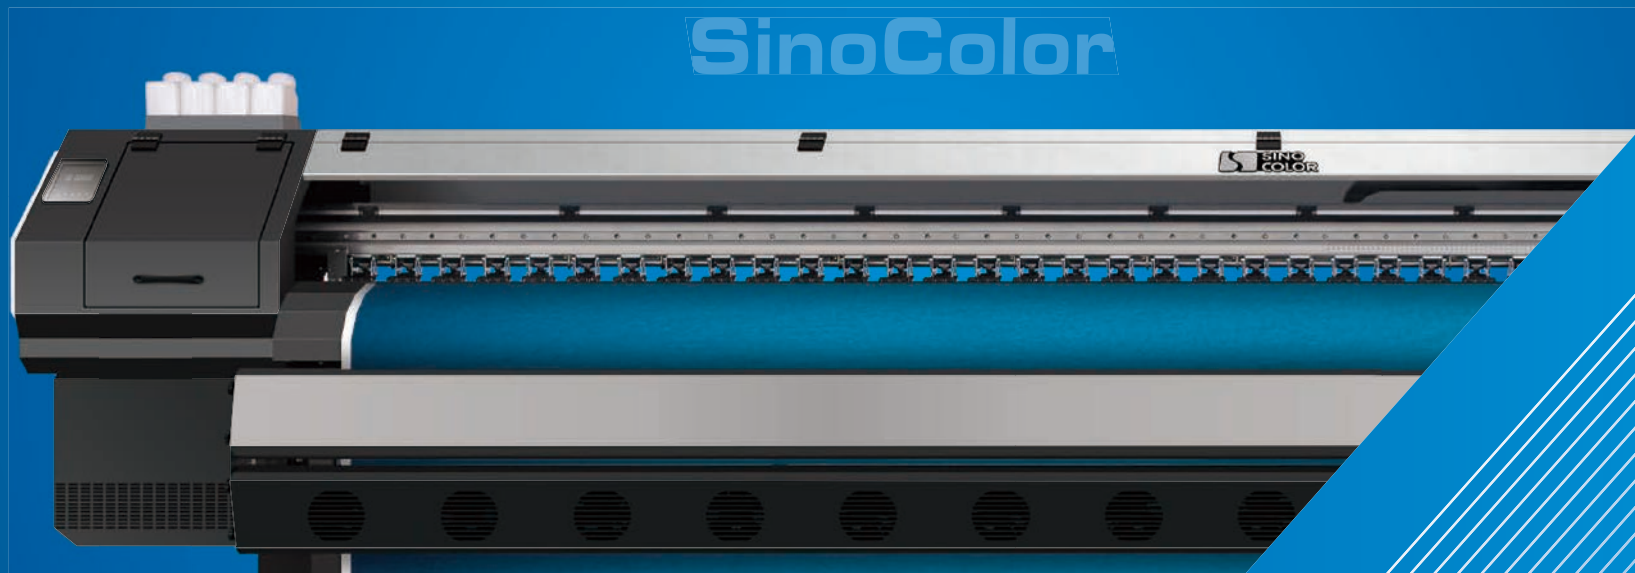

公司简介 Company Introduction

儒彩打印设备(上海)有限公司 (SinoColor Co.,Ltd) 是一家专业从事工业打印设备生产, 研发和销售的高新企业。公司产品包括UV卷材与平板打印机, 高精度写真机, 纺织物打印机, 旗帜打印机, 广告喷绘机等。

公司总部位于上海, 上海广告设备供应商协会会员 (CSA) 出口20强企业。通过多年的发展和努力, 儒彩凭借扎实的技术, 专业的管理, 团队细心, 耐心, 严谨的工作, 在广大客户群体中建立了良好的品牌形象。截止目前, 公司产品已远销至包括美国、英国、德国、西班牙、意大利、希腊、波兰、俄罗斯、阿联酋、沙特、巴西、秘鲁、智利、中美洲、大洋洲、韩国、菲律宾、泰国、非洲等在内的100多个国家与地区。我们致力于不断为客户提供更好的产品, 更好的服务, 欢迎您的垂询与合作。

SinoColor Co., Ltd. is a high-tech enterprise specialized in developing and manufacturing industrial printing equipment. The company's product including UV printer, Textile printer, Flatbed printer, Eco solvent printer, Solvent printer etc. We are offering OEM and ODM service.

Company is comprised by SinoColor Printing Equipment(Shanghai) Co., Ltd and SinoColor (HK) Co.,Ltd., headquartered in Shanghai, China. Top 20 exporter of China Sign Association (CSA).

Through years of development and efforts, SinoColor has established a great brand image among customers and cooperated with a number of national and area agents around the world to guarantee equipment's after-sales service. The company's products have been exported to more than 100 countries including the United States, Britain, Portugal, Spain, Italy, Mexico, Sri Lanka, Poland, Russia, Jordan, UAE, Saudi Arabia, Brazil, Chile, India etc. We are dedicating to offer better product and better service for our customer, welcome you to contact and cooperate with us.



Eco Solvent Printer

1.8m DX8/DX5 Printhead

1.8米 爱普生DX8/DX5 户内外写真机

Dual Heads 双喷头

4/6 Color 4/6色写真


Variable Dot 可变墨滴

3-Stage Heater 三段加热

2 Sizes & 3 Print-head Configurations Available
提供两种尺寸和三种喷头配置



● Features 特点



Equipped Epson DX5 or DX8 head
4 colors and 6 colors models are optional

爱普森DX5和DX8两种喷头可选
根据你的需求来选择4色或者6色输出



Aluminum Moulding Frame
Increase machine accuracy and extend machine durability

铝型材开模
提升机器运行精度并延长使用寿命



Variable Dot Print Technology
Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes

可变墨滴技术
使打印画面的颜色过渡更加自然，实现高质量成像



Integrated Take Up System (Optional)
It offers adjustable roll widths, making it suitable for various sized media rolls and applications

收放布系统
卷幅宽度可调，适用于众多尺寸的卷材



1 Year or longer Warranty
The standard warranty period on average is one year. However, SinoColor would like to offer extra warranty period (conditions apply)
1年或更长的保修期
儒彩提供超长的保修期（特定前提）

- ★ New look has heavier, larger structure, and wider printing platform
新造型更加厚重大气，更宽的打印平台
- ★ Aluminous carriage girder ensures high accuracy of carriage movement
铝制小车梁，精度有保障
- ★ Dual feeding bar for loading heavy media
双送纸杆，以承受更重的耗材
- ★ Optional infrared heater for drying prints quickly
选配红外加热装置，画面极速烘干
- ★ Integrated temperature controller
一体式温控仪



● Specification 参数

Model No.	型号	SJ-740C	SJ-740	SJ-740i
Printhead	喷头	2 x Epson DX8	2 x Epson DX5	1 x Epson DX5
Resolution	精度	1440dpi max		
Ink Color	色彩	C M Y K / C M Y K Lc Lm	C M Y K	C M Y K
Media 耗材	Size 尺寸	1.8 meter		
	Types 种类	Flex Banner, Vinyl, One Way Vision, Banner Cloth, Window Film, Mesh Etc. 灯箱布, 车贴, 单透贴, 条幅布, 玻璃贴膜, 网格布等		
Speed 速度	4 Pass 标准	32 sqm/h	30 sqm/h	15 sqm/h
	6 Pass 精细	24 sqm/h	22 sqm/h	11 sqm/h
	8 Pass 照片	18 sqm/h	16 sqm/h	8 sqm/h
Ink Type	墨水	Eco Solvent Ink 弱溶剂墨水		
Ink Droplet	墨滴	1.5-21pl variable 1.5至21皮升可变墨滴		
Cleaning	清洗	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗、闪喷、封喷头		
Feed & take up	收放布	Automatic Media Feeding (Standard) & Take up System (Optional) 自动收放布		
Environment	环境	Temperature: 20-28 °C, Humidity: 40%-60%		
Rip Software	软件	Maintop/ Photoprint/ Onyx		
Interface	接口	USB2.0		
Power	电源	Machine 50/60HZ, 110 / 220V, 1500W		
Size & Weight	Machine 机器	L3100 x W780 x H1500 mm / 280 KG		
	Packing 包装	L3160 x W960 x H760 mm / 400 KG		

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

Eco Solvent Printer

3.2m DX8 / DX5 Printhead 3.2米 爱普生 DX8 / DX5 户内外写真机

2 Sizes & 3 Print-head Configurations Available 提供两种尺寸和三种喷头配置可选

Dual Heads 双喷头

4/6 Color 4/6色写真

Variable Heads 可变墨滴

3-stage Heater 三段加热




Eco Solvent Printer | SJ-1260 & SJ-1260C

● Features 特点



Equipped Epson DX5 or DX8 head
4 colors and 6 colors models are optional

爱普森DX5和DX8两种喷头可选
根据你的需求来选择4色或者6色输出



Continuous Ink Supply System
Simplify the printing process. No need to add ink frequently

配置大供墨系统
连续大量供墨，能够长时间打印



Variable Dot Print Technology
Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes
可变墨滴技术
使打印画面的颜色过渡更加自然，实现高质量成像



High Precision Platform
With SinoColor high precision aluminum platform, the stable and consistent print quality are thus guaranteed
高精度打印平台
采用铝合金材质，确保打印质量



1 Year or longer Warranty
The standard warranty period on average is one year. However, SinoColor would like to offer extra warranty period (conditions apply)
1年或更长的保修期
儒彩提供超长的保修期（特定前提）

- ★ Media feeding motor and dual feeding bar are standard equipment, for loading heavy media
标配送纸电机，双送纸杆，以承受更重的耗材
- ★ Aluminous carriage girder ensures high accuracy of carriage movement
铝制小车梁，精度有保障
- ★ Optional infrared heater for drying prints quickly
选配红外加热装置，画面极速烘干
- ★ New look has heavier, larger structure, and wider printing platform
新造型更加厚重大气，更宽的打印平台
- ★ Integrated temperature controller
一体式温控仪



● Specification 参数

Model No.	型号	SJ-1260C	SJ-1260
Printhead	喷头	2 x Epson DX8	2 x Epson DX5
Resolution	精度	1440dpi max	
Ink Color	色彩	C M Y K / C M Y K Lc Lm	C M Y K
Media 耗材	Size 尺寸	3.2 meter	
	Types 种类	Flex Banner , Vinyl, One Way Vision, Banner Cloth, Window Film, Mesh Etc. 灯箱布, 车贴, 单透贴, 条幅布, 玻璃贴膜, 网格布等	
Speed 速度	4 Pass 标准	36 sqm/h	34 sqm/h
	6 Pass 精细	26 sqm/h	24 sqm/h
	8 Pass 照片	20 sqm/h	18 sqm/h
Ink Type	墨水	Eco Solvent Ink 弱溶剂墨水	
Ink Droplet	墨滴	1.5-21pl variable 1.5至21皮升可变墨滴	
Cleaning	清洗	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗、闪喷、封喷头	
Feed & take up	收放布	Automatic Media Feeding (Standard) & Take up System (Optional) 自动收放布	
Environment	环境	Temperature: 20-28 °C, Humidity: 40%-60%	
Rip Software	软件	Maintop/ Photoprint/ Onyx	
Interface	接口	USB2.0	
Power	电源	Machine 50/60HZ, 110 / 220V, 2000W	
Size & Weight	Machine 机器	L4360 x W780 x H1500 mm / 480 KG	
	Packing 包装	L4560 x W960 x H760 mm / 640 KG	

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

Eco Solvent Printer

1.6m DX8 / DX5 Printhead

1.6米 爱普森 DX8 / DX5 户内外写真机

Single Head
单喷头

4/6 color
4/6色写真

Variable Dot
可变墨滴



Eco Solvent Printer | ES-640 & ES-640C

● Features 特点



Equipped Epson DX5 or DX8 head
4 colors and 6 colors models are optional

爱普森DX5和DX8两种喷头可选
根据你的需求来选择4色或者6色输出



High Precision Platform
With SinoColor high precision aluminum platform, the stable and consistent print quality are thus guaranteed

高精度打印平台
采用铝合金材质，确保打印质量



Variable Dot Print Technology
Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes

可变墨滴技术
使打印画面的颜色过渡更加自然，实现高质量成像



Free ICC Profiles
The SinoColor support provides a batch of free icc profiles for different major media and inks

标配多种ICC配置文件
节省配置时间，以便尽快进入生产



1 Year or longer Warranty
The standard warranty period on average is one year. However, SinoColor would like to offer extra warranty period (conditions apply)

1年或更长的保修期
儒彩提供超长的保修期（特定前提）

★ New look has heavier, larger structure, and wider printing platform
新造型更加厚重大气，更宽的打印平台

★ Dual feeding bar for loading heavy media
双送纸杆，以承受更重的耗材

★ Optional infrared heater for drying prints quickly
选配红外加热装置，画面极速烘干



● Specification 参数

Model No.	型号	ES-640C	ES-640
Printhead	喷头	1 x Epson DX8	1 x Epson DX5
Resolution	精度	1440dpi max	
Ink Color	色彩	C M Y K / C M Y K Lc Lm	C M Y K
Media 耗材	Size 尺寸	1.6 meter	
	Types 种类	Flex Banner , Vinyl, One Way Vision, Banner Cloth, Window Film, Mesh Etc. 灯箱布, 车贴, 单透贴, 条幅布, 玻璃贴膜, 网格布等	
Speed 速度	4 Pass 标准	20 sqm/h	18 sqm/h
	6 Pass 精细	14 sqm/h	12 sqm/h
	8 Pass 照片	10 sqm/h	8 sqm/h
Ink Type	墨水	Eco Solvent Ink 弱溶剂墨水	
Ink Droplet	墨滴	1.5-21pl variable 1.5至21皮升可变墨滴	
Cleaning	清洗	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗、闪喷、封喷头	
Feed & take up	收放布	Automatic Media Feeding (Standard) & Take up System (Optional) 自动收放布	
Environment	环境	Temperature: 20-28 °C, Humidity: 40%-60%	
Rip Software	软件	Maintop/ Photoprint/ Onyx	
Interface	接口	USB2.0	
Power	电源	Machine 50/60HZ, 110 / 220V	
Size & Weight	Machine 机器	L2470 x W650 x H1100 mm / 150 KG	
	Packing 包装	L2600 x W850 x H650 mm / 220 KG	

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

Speedy Monster HAS UPGRADED!

8 heads 2 pass can reach up to 280 sqm per hour

超高速 再进化 豪华机身隆重登场
8头两PASS可达280平方米每小时!



Luxury Frame
豪华机身

4/8 Heads
4/8喷头

Super Stability
超稳定

Double 4 Color
双4色喷绘

● Features 特点



Luxury Frame, Quality Parts Inside

Built with all high quality parts, extend printer stability and durability

进口配件，豪华机身
机器稳定性和耐用性进一步提升



Printhead Capping

The additional capping system effectively prevent the printhead from clogging when the printer is idle

打印头保护
额外的封盖系统有效地防止打印头空闲时被堵塞



Unsurpassed Print Speed

Thanks to the latest Konica print technology, maximum print speed can be 280 square meters per hour

无与伦比的打印速度
最高打印速度可达每小时280平方米



Separate Ink Purge System

It allows user to purge each color separately, or flush each printhead with cleaning liquid

独立的墨水清洗系统
分色单独清洗，或用清洁液冲洗每个打印头



Advanced Media Handling

The media take up is strong enough to load heavy rolls around 120KG

强大的收放布系统
收放布系统能够承载120KG左右的重卷

★ KM-512i has 512 nozzles. Firing frequency is increased by more than 4 times. Within every second, each printhead can print 30000 ink drop.

KM512i喷头拥有512个喷嘴，点火频率增加了4倍以上。每秒钟内，每只喷头能打印30000个墨点

★ Germany IGUS Towline&Cable and KNF Air Pump
德国IGUS拖链和高柔电缆、KNF空气泵

★ Panasonic 400W Servo Motor (X Direction)
日本松下400W伺服电机 (X方向)

★ Japanese NSK Bearing
日本NSK轴承



● Specification 参数

Model No.	型号	KS-3208	KS-3204
Printhead	喷头	8 x KM-512iLNB-30PL	4 x KM-512iLNB-30PL
Resolution	精度	720dpi max	
Ink Color	色彩	C M Y K	
Media 耗材	Size 尺寸	3.2 meter	
	Types 种类	Flex Banner, Vinyl, Banner Cloth, Reflective Film, Mesh Etc. 灯箱布, 车贴, 条幅布, 反光膜, 网格布等	
Speed 速度	2 Pass 草图	280 sqm/h	140 sqm/h
	3 Pass 标准	180 sqm/h	90 sqm/h
	4 Pass 精细	140 sqm/h	60 sqm/h
Ink Type	墨水	Solvent Ink 溶剂墨水	
Ink Capacity	墨瓶	5 liter 5 升	
Cleaning	清洗	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗、闪喷、封喷头	
Feed & take up	收放布	Automatic Media Feeding (Standard) & Take up System (Optional) 自动收放布, 标配放布电机	
Environment	环境	Temperature: 20-28 °C, Humidity: 40%-60%	
Rip Software	软件	Maintop/ Photoprint	
Interface	接口	USB2.0	
Power	电源	Machine 50/60HZ, 110 / 220V, 4000W	
Size & Weight	Machine 机器	L4840 xW1120 xH1490 mm / 650KG	
	Packing 包装	L4800 xW1050 xH1500 mm / 800KG	

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

A2/A3 UV Flatbed Printer

Materialize Your Creativity into Colors and Shapes

A2/A3 UV平板打印机

将您的创造力转化为现实




High Speed
速度快

Super Reliable
超稳定

Versatile
用途广泛

Easy to Use
易于使用

● Features 特点



SinoColor System. Much more professional and more stable than desktop modified printer. Control the color freely.

SinoColor系统相比改装机更多功能可实现，色彩控制更加随心所欲。



Media Sensor. Automatically detect material height.

限位感应器 自动感应材料高度。



Well-designed touch screen. Easily Adjust platform position.

触控显示屏方便调节平台位置。



Branded circuit breaker to protect the safety of the whole electronic system.

漏电保护开关保护整机电路系统安全。



Well-designed adjustable platform. The good smoothness of platform and high accuracy printing are guaranteed.

可调节的平台设计保证平台始终处于平整状态以达到最高的打印精度。



● Specification 参数

Model No.	型号	UF-300C	UF-600
Printhead	打印喷头	Single Epson DX8	Single Epson DX7
Resolution	打印精度	1440dpi MAX	
Max Speed	打印速度	3 minutes for A3 size	6 minutes for A2 size
Print Head Height	喷头高度	20 cm Max	
Printing Size	打印尺寸	30 x 50 cm Max	42 x 60 cm Max
Print Direction	打印方向	Intelligence double sided	
Print Method	打印方法	micro piezo print technology, intelligence drops transformation technology	
Height Adjust	高度调节	Electric	
Distance of Print Head Printing		1-3 mm (1 mm is the best)	
Ink Color	墨水颜色	CMYK/ CMYK,LC,LM/ CMYK, White	
Ink Supply System	供墨系统	CISS	
Ink Consumption	墨水消耗	15-20 ml / square meter	
Min Ink Drop Size	墨滴大小	< 1.5 PL	
Interface	输入接口	USB2.0	
Rip Software	图像处理	Maintop (Standard)/ Photoprint (Optional)/ Onyx (Optional)	
Working Environment	工作环境	Temperature 18-30 Celsius, Humidity 30-70 RH, Clean room, Low dust, Less sun light	
Power	电源输入	AC 110/220 V, 50 Hz/60 Hz	
Size & Weight	Machine 机器	L670mm W565mm H635mm / 90KG	
	Packing 包装	L745mm W745mm H730mm / 100KG	

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

Epson Series UV Flatbed Printer

90x60cm 宽幅 UV平板打印机

FB-0906



- 2/3 Printheads 2/3喷头
- 4/6/7/8-Color 4/6/7/8色写真
- Variable Dot 可变墨滴
- White & Varnish 白色和光油

● Features




Equipped with Epson latest L1440 print-head, which is officially recommended for UV Printing

配备爱普生L1440喷头，UV打印官方推荐喷头



Designed X direction width set at 90cm instead of 60cm, effectively increase the printing speed of same resolution

X方向从60cm升级为90cm. 极大的减少了每个画面打印的Pass数, 显著提高同一精度下的打印速度



Well-designed built-in rotary device is optional. Fit for different type of cylinder shape subject. More stable and functional than external device and save space.

内嵌旋转装置, 适用于各类圆柱体打印, 较外置装置更稳定



Automatic media height detecting function, provide great help for setting the proper print height

配备自动测高功能, 有效简化材料厚度设置



Split Design Base Rack Is Optional

Printer and base rack using split design (base rack is optional), compact and easy to place, greatly reduce the package size, save the transportation fee

分体式紧凑机身设计, 减少机器尺寸, 实现有限办公空间的高效利用



● Specification

Model No.	型号	FB-0906
Printhead	喷头	2 or 3 Epson L1440 / Epson DX8
Resolution	精度	Max 1440 dpi
Media 耗材	Thickness 厚度	12 cm MAX
	Size 尺寸	900 x 600 mm
	Types 种类	Glass, Acrylic, Ceramic, Metal, Paper, Wood, Leather, PVC, PP, PE, PTFE Etc. 玻璃, 亚克力, 陶瓷, 金属, 纸, 木板, 皮革, PVC, PP, PE, PTFE等
Speed 速度	4 Pass 草图	12 sqm/h (Color+White)
	6 Pass 标准	8 sqm/h (Color+White)
	8 Pass 精细	6 sqm/h (Color+White)
Ink 墨水	Type 墨水	UV Ink
	Color 颜色	C M Y K / C M Y K Lc Lm + White or Varnish
	Capacity 墨瓶	500 ml
	Dry System 干燥	UV-LED Light System
PC Operation System	系统	Windows 7, Windows XP, Windows 10
Environment	环境	Temperature: 20-28 C, Humidity: 40%-60%
Rip Software	软件	Maintop / Photoprint / Onyx (optional)
Image Format	图片格式	TIFF, JPEG, EPS, PDF...
Power	电源	Max 3.6KW, AC 50/60Hz, 220V(±10%)>12A
Size 尺寸	Machine 机器	L2200 x W1250 x H1400 mm
	Packing 包装	L1820 x W1780 x H1500 mm
Weight 重量	Machine 机器	350 KG
	Packing 包装	400 KG

Specifications are subject to change without notice. 以上参数可能随机器版本改变, 请以厂家最新数据为准。

Epson L1440 Series UV Flatbed Printer

250x130CM 宽幅UV平板打印机

Epson L1440 Printheads

L1440喷头

Variable Dot

可变墨滴

4 Color

4色写真

White & Varnish Optional

白色和光油可选

3 Size Available 提供三种尺寸




● Features 特点



Equipped with Epson latest L1440 print-head, which is officially recommended for UV Printing.

配备爱普生L1440喷头，UV打印官方推荐喷头



Well-designed built-in rotary device is optional. Fit for different type of cylinder shape subject. More stable and functional than external device and save space.

内嵌旋转装置，适用于各类圆柱体打印，较外置装置更稳定



Automatic media height detecting function, provide great help for setting the proper print height

配备自动测高功能，有效简化材料厚度设置



High-power independent vacuum system. Much more practical and functional than the vacuum system with small-power internal vacuum fans.

高功率独立吸风系统，较低功率内置风扇吸风系统更实用，稳定，便利



Lack ink alarm system is equipped. Give LED light signal reminding operator to fill the ink. No interruption during printing job any more.

配备低墨量报警系统，提醒用户加墨

- ★ The high precision machine frame ensures perfect print resolution
高精度的机器框架确保完美的打印分辨率
- ★ X axis's gear fixation components are processed with one-time molding technology
X轴的齿轮固定部件采用一次成型技术进行加工，以确保最高分辨率标准
- ★ X axis is equipped with dual guide rail which ensures smooth movement of carriage
X轴配备双导轨，确保小车的平稳运动
- ★ Y axis is using screw drive transmission mode
Y轴采用丝杠传动方式，比皮带传动精度高得多



● Specification 参数

Model No.	型号	FB-2513
Printhead	喷头	2 or 3 Epson L1440 / Epson DX8
Resolution	精度	Max 1440 dpi
Media 耗材	Thickness 厚度	10 cm MAX
	Size 尺寸	2500 x 1300 mm
	Types 种类	Glass, Acrylic, Ceramic, Metal, Paper, Wood, Leather, PVC, PP, PE, PTFE Etc. 玻璃, 亚克力, 陶瓷, 金属, 纸, 木板, 皮革, PVC, PP, PE, PTFE等
Speed 速度	Draft 草图	63 sqm/h (Color Only)
	Standard 标准	32 sqm/h (Color Only)
	Quality 精细	21 sqm/h (Color Only)
Ink 墨水	Type 墨水	UV Ink
	Color 颜色	CMYK/CMYK,LC,LM + White (Or add one more printhead to print Color+White+Varnish)
	Capacity 墨瓶	500 ml
	Dry System 干燥	UV-LED Light System
PC Operation System 系统		Windows 7, 32/64bit, RAM≥8G
Environment 环境		Temperature: 20-28 °C, Humidity: 40%-60%
Rip Software 软件		Maintop / Photoprint / Onyx(optional)
Image Format 图片格式		TIFF, JPEG, EPS, PDF...
Power 电源		Max 3.6KW, AC 50/60Hz, 220V(±10%)>12A
Size 尺寸	Machine 机器	L3700 x W2300 x H1550 mm
	Packing 包装	L3700 x W2300 x H1600 mm
Weight 重量	Machine 机器	900 KG
	Packing 包装	1000 KG

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

Ricoh GEN5 Series UV FLATBED PRINTER

2.5 x 1.3 meter / 2 x 3 meter

3 Size Available 提供三种尺寸

- 3/4/6 Heads 3/4/6/8个喷头
- 4/5/6-Color 4/5/6色彩配置
- Variable Dot 可变墨滴
- White & Varnish 白色和光油



● Features 特点




Ricoh GEN5 Printhead
It is designed with longevity and robustness in mind and widely used in many latest industrial inkjet printers
理光 GEN5 打印喷头
它的设计考虑到工业使用所需求的寿命和坚固性



Mature negative pressure ink supply system, ensures the stability of the ink hydraulic pressure.

成熟的负压系统供墨，保障墨水液压稳定




Alumina oxide platform, decent, high precision, easy to clean.

全氧化铝平台，美观，高精度，便于清洁



Dual advanced guide rail designed. Well increased the strength of the carriage rail, to ensure the stability of long span movement of the carriage.

应用高端导轨，双导轨设计极大提升轨道强度，确保喷头小车在长跨度打印中运行稳定



Automatic media height detecting function, provide great help for setting the proper print height.

配备小车自动测高系统，辅助定位材料厚度

- ★ manufacturing technology as well as imported core parts enable perfect output of 1440dpi resolution
制造技术加上进口核心部件完美输出1440 dpi分辨率
- ★ Advanced controlling and driving system improve speed by 12% compared with other similar machine
先进的控制和驱动系统改进使得速度领先于其他类似机器12%
- ★ Industrial mechanical structure design ensures stable printing in 7*24hrs
工业机械结构设计确保稳定打印7 * 24小时
- ★ Top RIP makes perfect color reproduction
顶级RIP 完美色彩再现



● Specification 参数

Model No.	型号	FB-2513R	
Printing Size	打印尺寸	2500 x 1300 mm	
Printing Head	打印喷头	Ricoh - Gen5/7PI	
Resolution	打印精度	360, 720, 1080, 1440 dpi	
Printhead Height	喷头高度	0-80 mm (Adjustable)	
Ink 墨水	Type	墨水种类	UV
	Color	墨水颜色	CMYK Lc Lm White
Speed 速度	Color Mode	颜色模式	2 Heads (CMYK) / 3 Heads (CMYK,LC,LM/CMYK,W)
	Draft	草图模式	14 sqm/h (With 3 Printheads)
	Standard	标准模式	10 sqm/h (With 3 Printheads)
	Quality	精细模式	8 sqm/h (With 3 Printheads)
Image Format	图片格式	JPG, TIF, PDF, PNG, EPS Etc.	
Rip Software	操作软件	Photo Print	
Curving Mode	弯曲模式	LED-UV Light / Power Consumption 400W, Fast Dry	
Power Input	电力输入	AC 220V, 50/60Hz	
Power Consumption	电力消耗	Printing Mode ≈ 3500W, Sleep Mode ≈ 600W	
Size 尺寸	Machine	机器尺寸	L4200 x W2100 x H1400 mm
	Packing	包装尺寸	L4300 x W2200 x H1500 mm
Printer Weight	机器重量	900 KG	

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

Epson Series UV Roll to Roll Printer

1.8米UV卷材打印机 — 高性价比之选


Dual Heads
双喷头

4/5/6/7-Color
4/5/6/7色写真


Variable Dot
可变墨滴

White Optional
白色可选

2 Sizes & 2 Print-head Configurations Available 提供两种尺寸和两种喷头配置

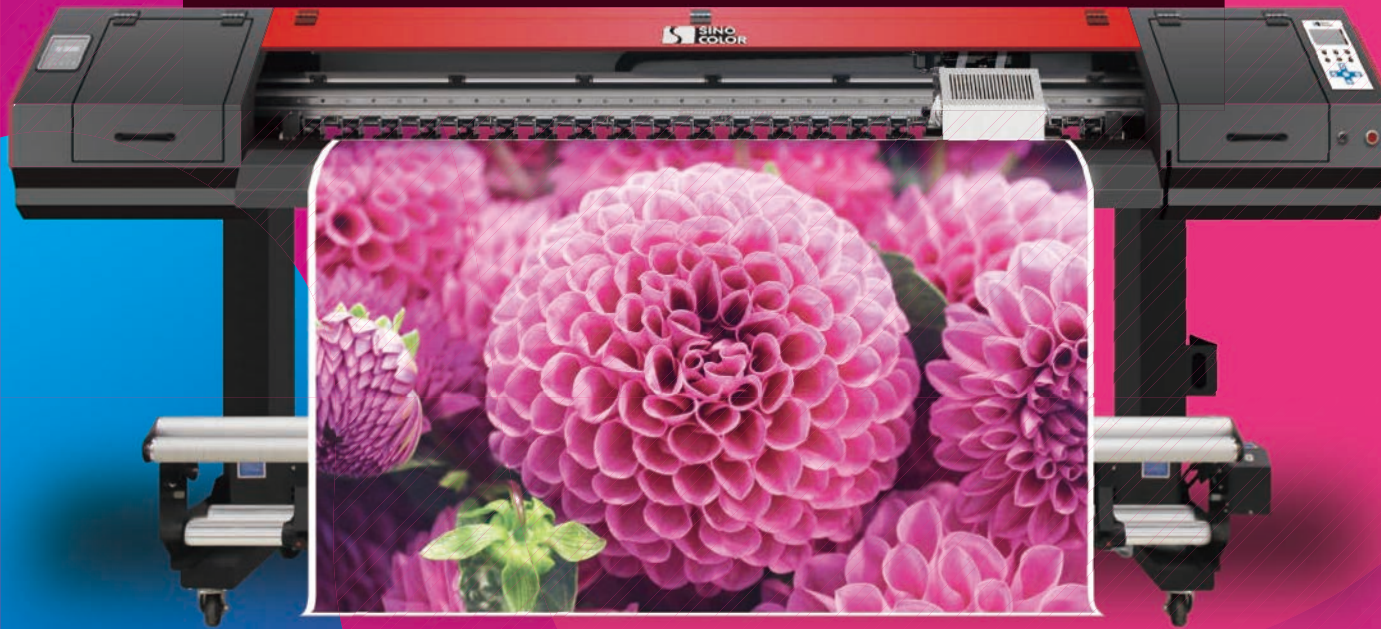

● Features 特点



Equipped Epson DX5 or DX8 head
4 colors and 6 colors according to your needs to choose

爱普森DX5和DX8两种喷头可选
根据你的需求来选择4色或者6色输出




Water Cooling UV-LED Lamp
It is one of the world's top UV-LED, long lifespan, low heat, and instant on-off

水冷UV-LED灯
装备世界顶级的UV-LED，寿命长，发热低，即时开关



Variable Dot Print Technology
Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes
可变墨滴技术
使打印画面的颜色过渡更加自然，实现高质量成像



Aluminum Moulding Frame
Increase machine accuracy and extend machine durability

铝型材开模
提升机器运行精度并延长使用寿命



Advanced Media Handling
With SinoColor advanced movement control system, each pass is uniform allowing for more sellable output in less time
强大的收放布系统
儒彩先进的收放布控制系统，提高生产效率

- ★ High-density UV curable ink produces rich, vibrant colors on coated or uncoated media
高品质UV固化墨水在涂层或非涂层材料上实现丰富而鲜明的色彩
- ★ Durable, scratch-resistant and virtually odorless, Up to three years outdoor durability without lamination
画面持久，耐刮擦，无异味，不覆膜长达三年的户外耐候性
- ★ Dual UV-LED lamp with long life, low heat and instant on/off
双UV-LED灯，超长使用寿命，发热量低，极速启停
- ★ Front and rear dual Tention bar (optional)
前后双张力杆，完美解决弹性材料步进问题（选配）



● Specification 参数

Model No.	型号	UV-740	UV-740C
Printing Head	打印喷头	2 x Epson DX5	2 x Epson DX8
Resolution	打印精度	1440 dpi MAX	
Media 耗材	Width 耗材宽度	1800 mm MAX	
	Type 耗材种类	Canvas, Garment, Leather, PET Film, Reflective Film, Soft Ceiling Film & More Flexible Material Etc. 天花软膜、灯布、车贴、服装、皮革、PET膜、反光膜以及其他众多卷材	
Speed 速度	Draft 草图模式	14 m ² /h	15 m ² /h
	Standard 标准模式	10 m ² /h	12 m ² /h
	Quality 精细模式	6 m ² /h	8 m ² /h
Ink 墨水	Type 墨水类型	UV Ink	
	Color 墨水颜色	CMYK / CMYK + W	CMYK Lc Lm / CMYK Lc Lm + W
	Curing 墨水固化	High Quality Whater Cooling UV-LED Lamp 水冷UV-LED灯	
Cleaning	清洗系统	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗、闪喷、封喷头	
Feed & TakeUp	收放布	Automatic Media Feeding (Standard) & Take up System (Optional) 自动收放布	
Rip Software	操作软件	Main Top / Photo Print / Onyx	
Connector	连接方式	USB 2.0	
Power	电力消耗	AC 110V / 220V ± 5%, 16A, 50/60Hz ± 1, 1500W MAX	
Size 尺寸	Machine 机器尺寸	L2960 x W800 x H1270 mm	
	Packing 包装尺寸	L2960 x W900 x H700 mm	
Weight 重量	Machine 机器重量	320 KG	
	Packing 机器重量	400 KG	

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

Epson Series UV Roll to Roll Printer

3.2米UV卷材打印机 — 高性价比之选


Dual Heads 双喷头

4/6-Color 4/6色写真


Variable Dot 可变墨滴

White Optional 白色可选

2 Sizes & 2 Print-head Configurations Available
提供两种尺寸和两种喷头配置

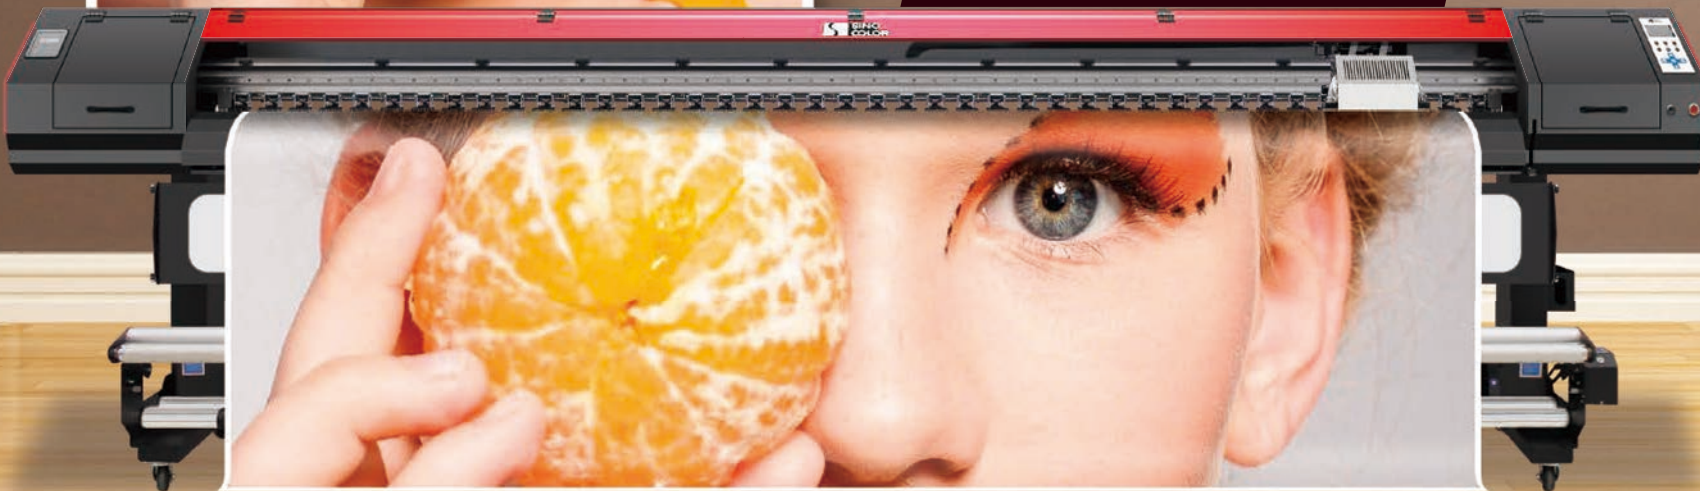

● Features 特点



Equipped Epson DX5 or DX8 head
4 colors and 6 colors according to your needs to choose

爱普森DX5和DX8两种喷头可选
根据你的需求来选择4色或者6色输出



Water Cooling UV-LED Lamp
It is one of the world's top UV-LED, long lifespan, low heat, and instant on-off

水冷UV-LED灯
装备世界顶级的UV-LED，寿命长，发热低，即时开关



Variable Dot Print Technology
Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes
可变墨滴技术
使打印画面的颜色过渡更加自然，实现高质量成像



Aluminum Moulding Frame
Increase machine accuracy and extend machine durability

铝型材开模
提升机器运行精度并延长使用寿命



Advanced Media Handling
With SinoColor advanced movement control system, each pass is uniform allowing for more sellable output in less time
强大的收放布系统
儒彩先进的收放布控制系统，提高生产效率

- ★ High-density UV curable ink produces rich, vibrant colors on coated or uncoated media
高密度UV固化墨水在涂层或非涂层材料上实现丰富而鲜明的色彩
- ★ Durable, scratch-resistant and virtually odorless, Up to three years outdoor durability without lamination
画面持久，耐刮擦，无异味，不覆膜长达三年的户外耐候性
- ★ Dual UV-LED lamp with longer life, low heat and instant on/off
双UV-LED灯，超长使用寿命，发热量低，极速启停
- ★ Front and rear dual Tention bar
前后双张力杆，完美解决弹性材料步进问题



● Specification 参数

Model No.	型号	UV-1260	UV-1260C
Printing Head	打印喷头	2 x Epson DX5	2 x Epson DX8
Resolution	打印精度	1440 dpi MAX	
Media 耗材	Width 耗材宽度	3200 mm MAX	
	Type 耗材种类	Canvas, Garment, Leather, PET Film, Reflective Film, Soft Ceiling Film & More Flexible Material Etc. 天花软膜、灯布、车贴、服装、皮革、PET膜、反光膜以及其他众多卷材	
Speed 速度	Draft 草图模式	34 m ² /h	36 m ² /h
	Standard 标准模式	24 m ² /h	26 m ² /h
	Quality 精细模式	18 m ² /h	20 m ² /h
Ink 墨水	Type 墨水类型	UV Ink	
	Color 墨水颜色	CMYK / CMYK + W	CMYK Lc Lm / CMYK Lc Lm + W
	Curing 墨水固化	High Quality Whater Cooling UV-LED Lamp 水冷UV-LED灯	
Cleaning	清洗系统	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗、闪喷、封喷头	
Feed & TakeUp	收放布	Automatic Media Feeding (Standard) & Take up System (Optional) 自动收放布	
Rip Software	操作软件	Main Top / Photo Print / Onyx	
Connector	连接方式	USB 2.0	
Power	电力消耗	AC 110V / 220V ± 5%, 16A, 50/60Hz ± 1, 2000W MAX	
Size 尺寸	Machine 机器尺寸	L4360 x W800 x H1270 mm	
	Packing 包装尺寸	L4560 x W960 x H760 mm	
Weight 重量	Machine 机器重量	550 KG	
	Packing 机器重量	640 KG	

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

8 Color Artwork UV Printer


3.2m With 4 pcs Epson Printhead

3.2米浮雕壁纸打印机

6 Color+White+Varnish
完美的彩白光油打印方案



● Features 特点



Equipped with 4 pcs Epson DX8 Heads. Print 6 color+White+Varnish. Achieve high-end printing

配备4个爱普生喷头，完美的彩白光油打印方案




High grade two-layer Germany Igus drag chain. Effectively protect ink tube and cables.

德国Igus双层拖链，有效保护墨管和线路



High Precision Platform
With SinoColor high precision aluminum platform, the stable and consistent print quality are thus guaranteed

高精度打印平台
采用铝合金材质，确保打印质量



Variable Dot Print Technology
Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes

可变墨滴技术
使打印画面的颜色过渡更加自然，实现高质量成像



1 Year or longer Warranty
The standard warranty period on average is one year. However, SinoColor would like to offer extra warranty period (conditions apply)
1年或更长的保修期
儒彩提供超长的保修期（特定前提）

- ★ High-density UV curable ink produces rich, vibrant colors on coated or uncoated media
高品质UV固化墨水在涂层或非涂层材料上实现丰富而鲜明的色彩
- ★ Durable, scratch-resistant and virtually odorless, Up to three years outdoor durability without lamination
画面持久，耐刮擦，无异味，不覆膜长达三年的户外耐候性
- ★ Dual UV-LED lamp with long life, low heat and instant on/off
双UV-LED灯，超长使用寿命，发热量低，极速启停
- ★ Front and rear dual Tention bar (optional)
前后双张力杆，完美解决弹性材料步进问题（选配）



● Specification 参数

Model No.	型号	UR-3204C
Printing Head	打印喷头	4 x Epson DX8
Resolution	打印精度	1440 dpi MAX
Media 耗材	Width 耗材宽度	1800 mm MAX
	Type 耗材种类	Canvas, Garment, Leather, PET Film, Reflective Film, Soft Ceiling Film & More Flexible Material Etc. 天花软膜、灯布、车贴、服装、皮革、PET膜、反光膜以及其他众多卷材
Speed 速度	Draft 草图模式	15 m ² /h
	Standard 标准模式	12 m ² /h
	Quality 精细模式	8 m ² /h
Ink 墨水	Type 墨水类型	UV Ink
	Color 墨水颜色	C M Y K LC LM +White +Varnish
	Curing 墨水固化	High Quality Whater Cooling UV-LED Lamp 水冷UV-LED灯
Cleaning	清洗系统	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗、闪喷、封喷头
Feed & TakeUp	收放布	Automatic Media Feeding (Standard) & Take up System (Optional) 自动收放布
Rip Software	操作软件	Main Top / Photo Print / Onyx
Connector	连接方式	USB 2.0
Power	电力消耗	AC 110V / 220V ± 5%, 16A, 50/60Hz ± 1, 1500W MAX
Size 尺寸	Machine 机器尺寸	L4840 x W1120 x H1490 mm
	Packing 包装尺寸	L4800 x W1050 x H1500 mm
Weight 重量	Machine 机器重量	700 KG
	Packing 机器重量	800 KG

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。



A3 DTG T-shirt Printer

DIRECT TO GARMENT



丁恤打印机

Easy to Use
易于使用


White Circulation
白墨循环

Super Reliable
超稳定

High Speed
速度快



● Features 特点



SinoColor System. Much more professional and more stable than desktop modified printer. Control the color freely.

SinoColor System 相比改装机更多功能可实现，色彩控制更加随心所欲。



Well-designed adjustable platform. The good smoothness of platform and high accuracy printing are guaranteed.

可调节的平台设计保证平台始终处于平整状态以达到最高的打印精度。



Well-designed touch screen. Easily Adjust platform position.

精心设计的触摸屏，轻松调整平台位置。



Branded circuit breaker to protect the safety of the whole electronic system.

漏电保护开关保护整机电路系统安全。



Maximumly use mold to produce machine components to achieve amazing resolution.

最大程度模具化生产设备组件以达到最高的精度。



● Specification 参数

Model No.	型号	TP-300	TP-600
Printhead	打印喷头	1x Epson DX7	2x Epson DX7
Resolution	打印精度	1440dpi	
Max Speed	打印速度	2 minutes for one T-shirt	
Print Head Height	喷头高度	10 cm Max	
Printing Size	打印尺寸	30 x 40 cm Max	40 x 60 cm Max
Print Direction	打印方向	Intelligence double side	
Print Method	打印方法	micro piezo print technology, intelligence drops transformation technology	
Height Adjust	高度调节	Electric	
Distance of Print Head Printing		1-3 mm (1 mm is the best)	
Ink Color	墨水颜色	4 colors (CMYK) or 5 colors (CMYK,W) or 6 colors (CMYK,LC,LM)	
Ink Supply System	供墨系统	CISS	
Ink Consumption	墨水消耗	15-20 ml / squre meter	
Min Ink Drop Size	墨滴大小	< 1.5 PL	
Interface	输入接口	USB2.0	
Rip Software	图像处理	Maintop (Standard)/ Photoprint (Optional)/ Onyx (Optional)	
Working Environment	工作环境	Temperature 18-30 Celsius, Humidity 30-70 RH, Clean room, Low dust, Less sun light	
Power	电源输入	AC 110/220 V, 50 Hz/60 Hz	
Size & Weight	Machine	机器	L670mm W565mm H635mm / 90KG
	Packing	包装	L745mm W745mm H730mm / 100KG

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

DUAL-PALLET

— A2 DTG PRINTER —

A2双台面T恤打印机

Dual Printheads
双喷头

Dual-Pallet
双台面

Modern design
现代化设计

SinoColor System
SinoColor系统




NEW



 SINO
COLOR

● Features



SinoColor System.
Much more professional and more stable than desktop modified printer.
Control the color freely.

SinoColor系统，相比改装机更多功能可实现，色彩控制更加随心所欲



Dual Epson Heads equipped.
Achieve real fast speed printing.

双喷头，彩白同出，保证高速打印




Built with dual-pallet.
Effectively improve the work efficiency.

双台面，有效提高工作效率



Well-designed touch screen.
Easily adjust platform position and do the cleaning.

触控显示屏，方便调节平台位置和清洗



High-end and Modern design.
Enhance the image of the company.
现代高端的设计，提升公司形象



● Specification

Model No.	型号	TP-600D	
Printhead	打印喷头	2x Epson Printhead	
Resolution	打印精度	1440dpi	
Max Speed	打印速度	2 minutes for one T-shirt	
Print Head Height	喷头高度	5 cm Max	
Printing Size	打印尺寸	2pcs 30*40cm pallet	
Print Direction	打印方向	Intelligence double side	
Print Method	打印方法	micro piezo print technology, intelligence drops transformation technology	
Height Adjust	高度调节	Electric	
Distance of Print Head Printing		1-3 mm (1 mm is the best)	
Ink Color	墨水颜色	4 colors (CMYK) or 5 colors (CMYK,W) or 6 colors (CMYK,LC,LM)	
Ink Supply System	供墨系统	CISS	
Ink Consumption	墨水消耗	15-20 ml / squre meter	
Min Ink Drop Size	墨滴大小	< 1.5 PL	
Interface	输入接口	USB2.0	
Rip Software	图像处理	Maintop (Standard)/ Photoprint (Optional)/ Onyx (Optional)	
Working Environment	工作环境	Temperature 18-30 Celsius, Humidity 30-70 RH, Clean room, Low dust, Less sun light	
Power	电源输入	AC 110/220 V, 50 Hz/60 Hz	
Size & Weight	Machine	机器	L1730*W1110*H630mm, 280KG
	Packing	包装	L1830*W1200*H830 mm, 400KG

Specifications are subject to change without notice.

Eco Solvent T-Shirt Printing Solution

70cm With Epson DX7 Printhead

70cm T恤打印方案



● Features 特点




70cm mini roll to roll printer
Easy to find space for it in the office, and extend the business to new area

小尺寸，空间需求小，方便拓展新业务




High Precision Platform
With SinoColor high precision aluminum platform, the stable and consistent print quality are thus guaranteed

高精度打印平台
采用铝合金材质，确保打印质量



Variable Dot Print Technology
Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes

可变墨滴技术
使打印画面的颜色过渡更加自然，实现高质量成像



Free ICC Profiles
The SinoColor support provides a batch of free icc profiles for different major media and inks

标配多种ICC配置文件
节省配置时间，以便尽快进入生产



1 Year or longer Warranty
The standard warranty period on average is one year. However, SinoColor would like to offer extra warranty period (conditions apply)

1年或更长的保修期
儒彩提供超长的保修期（特定前提）

★ New look has heavier, larger structure, and wider printing platform
新造型更加厚重大气，更宽的打印平台

★ Dual feeding bar for loading heavy media
双送纸杆，以承受更重的耗材

★ Optional infrared heater for drying prints quickly
选配红外加热装置，画面极速烘干



● Specification 参数

Model No.	型号	SJ-240
Printhead	喷头	1 x Epson DX7
Resolution	精度	1440dpi max
Ink Color	色彩	CMYK / CMYK Lc Lm
Media 耗材	Size 尺寸	70cm
	Types 种类	Heat Transfer Vinyl for T-shirt, Flex Banner, Vinyl, One Way Vision, Banner Cloth, Window Film, Mesh Etc. 热转移车贴, 灯箱布, 车贴, 单透贴, 条幅布, 玻璃贴膜, 网格布等
Speed 速度	4 Pass 标准	12 sqm/h
	6 Pass 精细	8 sqm/h
	8 Pass 照片	6 sqm/h
Ink Type	墨水	Eco Solvent Ink 弱溶剂墨水
Ink Droplet	墨滴	1.5-21pl variable 1.5至21皮升可变墨滴
Cleaning	清洗	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗、闪喷、封喷头
Feed & take up	收放布	Automatic Media Feeding (Standard) & Take up System (Optional) 自动收放布
Environment	环境	Temperature: 20-28 °C, Humidity: 40%-60%
Rip Software	软件	Maintop/ Photoprint/ Onyx
Interface	接口	USB2.0
Power	电源	Machine 50/60HZ, 110 / 220V

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

Direct Textile Printer

for Flag Polyester / Cotton Material

旗帜布/纯棉直喷一体机

Professional
专业

Dual Heads
双喷头

Super Reliable
超稳定

Easy to Use
易于使用



Direct Textile Printer | FP-740 & FP-1260




● Features 特点



Equipped Epson DX8/4720 Head
Latest Epson 4720 printhead boost the print speed into the sky. Flagship model DX8 reduce maintenance cost dramatically

装备爱普森DX8或4720喷头
采用最新技术，打印速度飞快



Integrated Sealed Heating Oven
20%+ energy saving,
Integrated ventilator saves space

一体式节能密封烘箱
节能20%以上，不额外占用空间



Heating Cutter (Optional)
unique small device that saves time for finishing process.

加热切刀(选配)
即印即切，方便快捷



Unsurpassed Print Speed

This model has 50% increased in speed, that means a lot of savings for a print company that requires multiple flag printers

无与伦比的打印速度
速度提高了50%，可节省大量成本



Advanced Media Handling
New feed adjuster system for even tensioning to prevent skewing

强大的送布系统
新送布调整系统有效避免了走布偏差

● Specification 参数

Model No.	产品型号	FP-640P	FP-740P	FP-1260P
Printhead 喷头	Type 喷头类型	1 x Epson 4720	Dual Epson 4720 (Three Heads Available)	
	Nozzles 喷嘴数量	3200 Nozzles		
	Height 高度调节	2-8mm Above Media Adjustable		
Max Printing Width 打印尺寸		1.6m (64 inches)	1.8 meter (74 Inches)	3.2 meter (126 Inches)
Resolution (dpi) 打印精度		1440 dpi		
Media Types 适应耗材		Sublimation Ink : Polyester, Chemical Fiber, Urethane Elastic Fibre, 35% Cotton, Heat Transfer Paper 涤纶, 化纤, 氨纶弹性纤维, 35%棉, 热转印纸 Textile Pigment Ink : 100% Cotton Material (not stretchable) 纯棉(无弹性)		
Ink 墨水	Type 墨水类型	Sublimation Ink, Textile Pigment Ink 热转印油墨, 纺织颜料墨水		
	Color 墨水颜色	4 Color / 6 Color		
	Droplet 墨滴大小	1.5 – 21pl Variable		
Speed 速度	Standard 标准模式	23 sqm/h	39 sqm/h	44 sqm/h
	Quality 精细模式	16 sqm/h	29 sqm/h	32 sqm/h
	Photo 照片模式	12 sqm/h	21 sqm/h	23 sqm/h
Feed & take up 收放布系统		Automatic Media Feeding & Take up System		
Cleaning 清洗系统		Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗, 闪喷, 封喷头		
Heating System 加热系统		Pre/Post Heater Equipped		
Cooling System 冷却系统		Cooling Fan Equipped		
Environment 工作环境		Temperature: 20-28 C , Humidity: 40%-60%		
Rip Software 图像处理		Maintop/ Photoprint/Wasatch		
Control Software 控制软件		SinoColor Print Console		
Interface 输入接口		USB2 .0		
Operation System 操作系统		Windows 7/XP		
Power 电源消耗		Machine 50/60HZ, 110 / 220V		
Packing Size 包装尺寸		L3210xW1000xH740 mm	L3210xW1000xH740 mm	L4610xW1000xH740 mm
		L3380xW770xH1300 mm	L3380xW770xH1300 mm	L4450xW1200xH1190 mm

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

Sublimation / Eco Printer


写真/热升华打印机

One Printer , Two Type Inks , Multifunction

一台机器，两种墨水，多种用途




● Features 特点



Equipped Epson 4720 Head
Latest Epson 4720 printhead boost the print speed into the sky. Flagship model DX8 reduce maintenance cost dramatically

装备爱普森4720喷头
采用最新技术，打印速度飞快



Continuous Ink Supply System
Simplify the printing process. No need to add ink frequently

标准大供墨系统
连续大量供墨，能够长时间打印




Aluminum Moulding Frame
Increase machine accuracy and extend machine durability

铝型材开模
提升机器运行精度并延长使用寿命



Free ICC Profiles
The SinoColor support provides a batch of free icc profiles for different major media and inks

标配多种ICC配置文件
节省配置时间，以便尽快进入生产



Variable Dot Technology
Variable dot produces droplets of different sizes for precise, high resolution graphics, smooth gradations and very good contrast

可变墨滴技术
平滑的渐变成就最佳的图像质量



● Specification 参数

Model No.	型号	SJ-740P
Printhead	喷头	2 or 3 Epson DX8 / Epson 4720
Resolution	精度	1440 dpi max
Media 耗材	Size 色彩	1.8 meter
	Types 种类	Heat transfer paper, flex banner, vinyl, one way vision, pp paper, etc 热转印纸, 灯箱布, 车贴, 单透, PP纸等
Speed 速度		3 pass 44sqm/h
		4 pass 35 sqm/h
		6 pass 26 sqm/h
Ink 墨水	Color 色彩	C M Y K
	Type 墨水	Sublimation Ink / Textile Pigment Ink / Eco Solvent Ink
Cleaning	清洗	Automatic Cleaning, Anti-Clogging Flash Function & Capping System
Cleaning	清洗	自动清洗、闪喷、封喷头
Heating System	加热系统	Pre/Middle/Post Heater Equipped 配备前/中/后三段加热
Drying System	环境	Equipped
Rip Software	软件	MainTop / PhotoPrint / Wasatch
Interface	接口	USB2.0
Power	电源	AC 220V, 50/60Hz
Size & Weight	Machine 机器	L2960mm W800mm H1270mm / 280KG
	Packing 包装	L3060mm W900mm H700mm / 400KG

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。



UV Hybrid Printer

UV roll to roll & flatbed All-in-One inkjet printer



1.6米板卷一体UV机

• Features 特点



Movable Printing Platform
For high-efficiency printing jobs regardless of standard or nonstandard, batch or single unit.

导带式打印平台
不管是批量或是单张均能高效打印



Roll Material System
Designed for roll to roll material, automatically media feeding and taking up.

卷材收放布系统
儒彩先进的收放布控制系统，提高生产效率



White Ink Stirring
Effectively prevent white ink from clogging

白墨搅拌
有效防止白墨堵头、断墨




Integrated Control Panel
Control the whole printer in one place, easy and efficient operation

高度整合的控制面板
仅在一处，便能全面操控整个机器



Cold Light UV LED
Curing with tiny temperature variation ensures high printing quality

UV冷光源
仅有小幅温度变化，确保稳定性

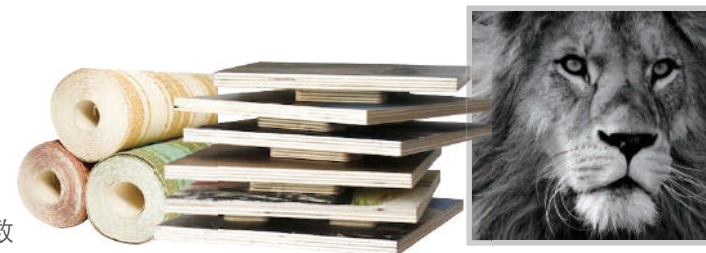

• Specification 参数

Model No.		产品型号	HUV-1600 HYBRID
Printhead		打印喷头	Double Epson DX5
Printing Width		打印宽度	1600 mm Max
Printing Resolution		打印精度	360x720, 720x720, 720x1080, 720x1440 DPI
Printing Technology		打印技术	Piezoelectric Inkjet
Printing Mode		打印模式	Uni-direction or Bi-direction
Ink 耗材	Type	墨水种类	UV Curing Ink (without VOC)
	Color	墨水颜色	CMYK / CMYK + W
	Supply	供墨系统	Continuous Supply System
Speed 速度	Standard Mode	标准模式	14 m ² /h (6 pass)
	Quality Mode	质量模式	10 m ² /h (8 pass)
	Photo Mode	照片模式	7 m ² /h (12 pass)
Media 墨水	Types	材料类型	Glass, Metal, Ceramic Tile, Acrylic, Plexiglass, Wood, Platic, Polystyrene, Fabric, Aluminum, Canvas, Leather, Cardboard, Foam Board, Plywood, Compositd Panel, Textile, Carpet, Vinyl, Paper, PP Sheet, PVC, MDF, WPC, ABS Etc.
	Thickness	材料厚度	0-80 mm (±0.5 mm)
	Absorption	材料回收	Intelligently Independent Suction System with Adjustable Power
Position System		定位系统	High-precision Encoder Strip
Drying System		干燥系统	LED UV Lamps with Cold Light Source
Interface		信息接口	HI-USB 2.0
Operation System		操作系统	Windows XP/7
RIP Software		图像处理	Photoprint / Maintop
Environment		工作环境	Temperature: 18-26 °C (64.4-78.8 °F); Humidity: 30-75%
Power		电力系统	AC 200 V, 50/60 Hz; Printing Mode: 2000 W; Sleep Mode: 600 W
Size 尺寸	Machine	机器尺寸	L3000 xW1800 xH1260 mm / 650 KG
	Packing	包装尺寸	L3050 xW1960 xH1480 mm / 850 KG

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。



儒彩打印设备(上海)有限公司

地址：上海市奉贤区沪杭公路1588号

电话：021-57436521

邮箱：sales@sinocolordg.com

网站：www.iruca.com

SINOCOLOR CO., LTD

Add: NO.1588, Huhang Road, Fengxian, Shanghai, China

Tel: 0086-21-57436521

Email: sales@sinocolordg.com

Web: www.SinoColorDG.com

